

**OMEGA**

**900TS-SERIES**

## Track scissor with levelling capabilities

- » Up to 13 m working height.
- » Standard double hydraulic powered extension decks
- » Easy levelling capabilities, side - side / fore - aft- manual and fully automatic controls.
- » Turret rotation 90 degrees each way - 180 degrees total.
- » Radiographic remote control.
- » Impressive lifting capacity.
- » Fully proportional drive control, with double joystick controllers.
- » Powerful diesel engine.

# 900-series Track scissor

## Specifications

	930TS
Max. working height	13,0 m
Max. platform height	11,0 m
Stowed height (top guardrails)	3,1 m
Width	4,0 m
Length - stowed	4,7 m
Track length	3,3 m
Lifting capacity	3.000 kg
Ground clearance	50 cm
Platform size extended - length (max) - several configurations possible	9,0 m
Platform size extended - width (max) several configurations possible	5,0 m
Drive speed stowed	2,5 km/h
Gradeability	40%
Weight - about (depends on configurations)	15.000 kg
Rotation	90 degrees

\*\* Extension decks are or SIDE / SIDE or FORE / AFT.


Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate operators manual for detailed instructions on the proper use and maintenance.



[www.omegasales.eu](http://www.omegasales.eu)

## Standard features

- » Up to 13 m working height.
- » Auto and manual levelling - 5° side / side & 5° fore / aft.
- » Radiographic remote controls.
- » Double hydraulic powered extension decks.
- » Fully proportional drive and lift control.
- » Easy maintenance access to mechanical, electrical and diesel components without raising platform or swinging out trays.
- » CE compliant.
- » On-Board diagnostic system.
- » Proportional turret rotation.

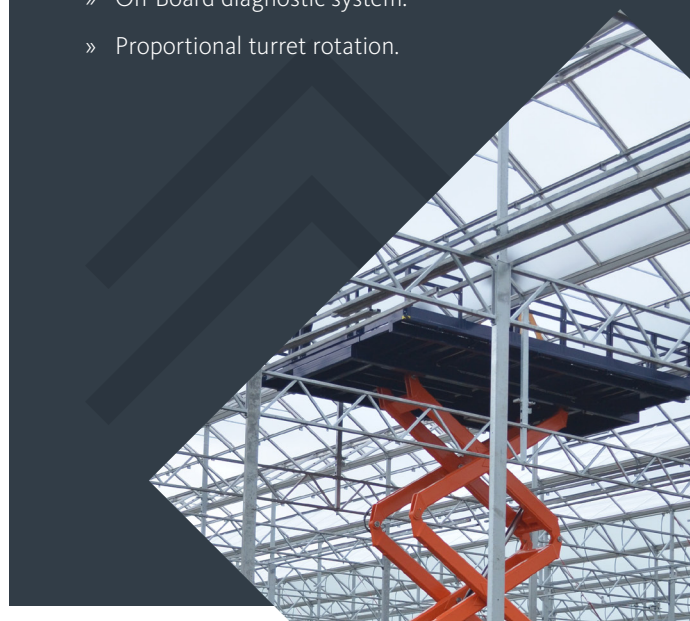

## Optional features

- » Hydraulic powered generator 380 / 230Vac, up to 6 kW.
- » DC / AC convertor for 230Vac supply, up to 3 kW.
- » Several engine configurations - Hatz, Kubota - with or without DPF System.
- » Hydraulic powered glass lifts, in combination with glass-guidance carriers.
- » Fixed upper control station, or a combination of fixed and radiographic controls.
- » Custom colours.
- » Rubber pads.

Leemidden 21  
2678 ME De Lier  
The Netherlands

+ 31 174 - 525 990  
sales@omegasales.eu